

Max Linear Actuator



IP65 weather protection rating making the actuator suitable for internal or external use.

Simple end bracket installation or sliding bracket mounting (to be ordered separately).

Adjustable eyelet for easier installation.


Stroke limiting collar available.

Supplied with 1m of cable.

Available ex stock in 300mm stroke and as a special indent in 500mm stroke.

Technical Specifications

Voltage	230VAC \pm 10%	230VAC \pm 10%
Electrical connection	3 wires + earth	3 wires + earth
Stroke	300mm	500mm
Force in push action	450N	350N
Speed	~ 20mm/sec	~ 20mm/sec
Max. current absorption	0.7A	0.7A
Parallel Connection	Yes	Yes
Stops	Microswitches	Microswitches
Safety stop	Thermal overload	Thermal overload
Protection Class	IP65	IP65
Time rating	20%	20%

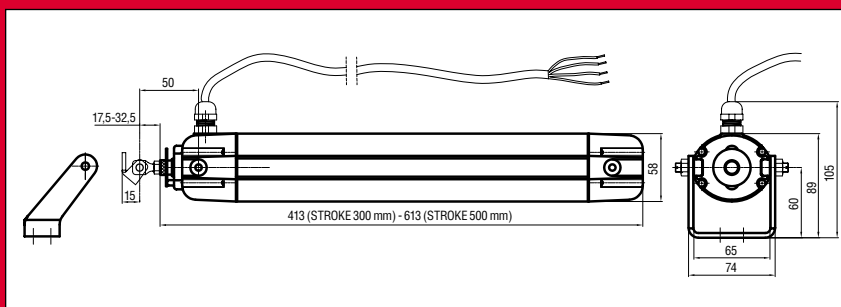

PO Box 2087, North Brighton
Victoria 3186, Australia
Telephone +61 3 9583 2969
Facsimile +61 3 9585 0449
email sales@arens.com.au

Ulysses Linear Spindle Actuator



IP65 weather protection rating making the actuator suitable for internal or external use.

Neat, slim body (34mm diameter)

Front or back fixing (back bracket to be ordered separately).


Stroke limiting collar available.

Supplied with 1.5m of cable.

Available ex stock in 180mm stroke and as a special indent in 300mm stroke.

Technical Specifications

Voltage	24VDC \pm 10%	24VDC \pm 10%
Stroke	180mm	300mm
Force	650N	800N
Speed	~ 6 mm/sec	~ 3 mm/sec
Max. current absorption	~ 1A	~ 0.8A
Operation	Polarity inversion	Polarity inversion
Parallel connection	Yes	Yes
Limit stop	Electronic	Electronic
Safety stop	Electronic	Electronic
Time rating	50%	50%
Protection class	IP65	IP65

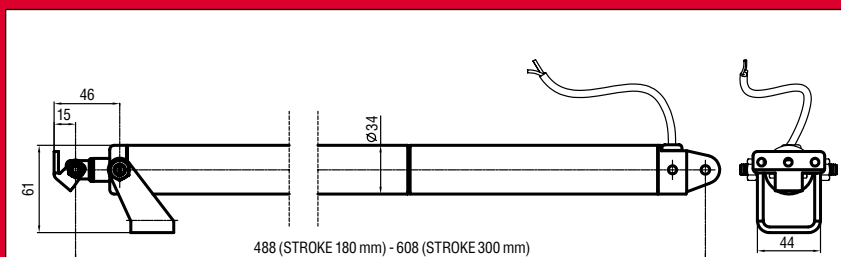

PO Box 2087, North Brighton
Victoria 3186, Australia
Telephone +61 3 9583 2969
Facsimile +61 3 9585 0449
email sales@arens.com.au